Oscilloscope

FIGURE 1

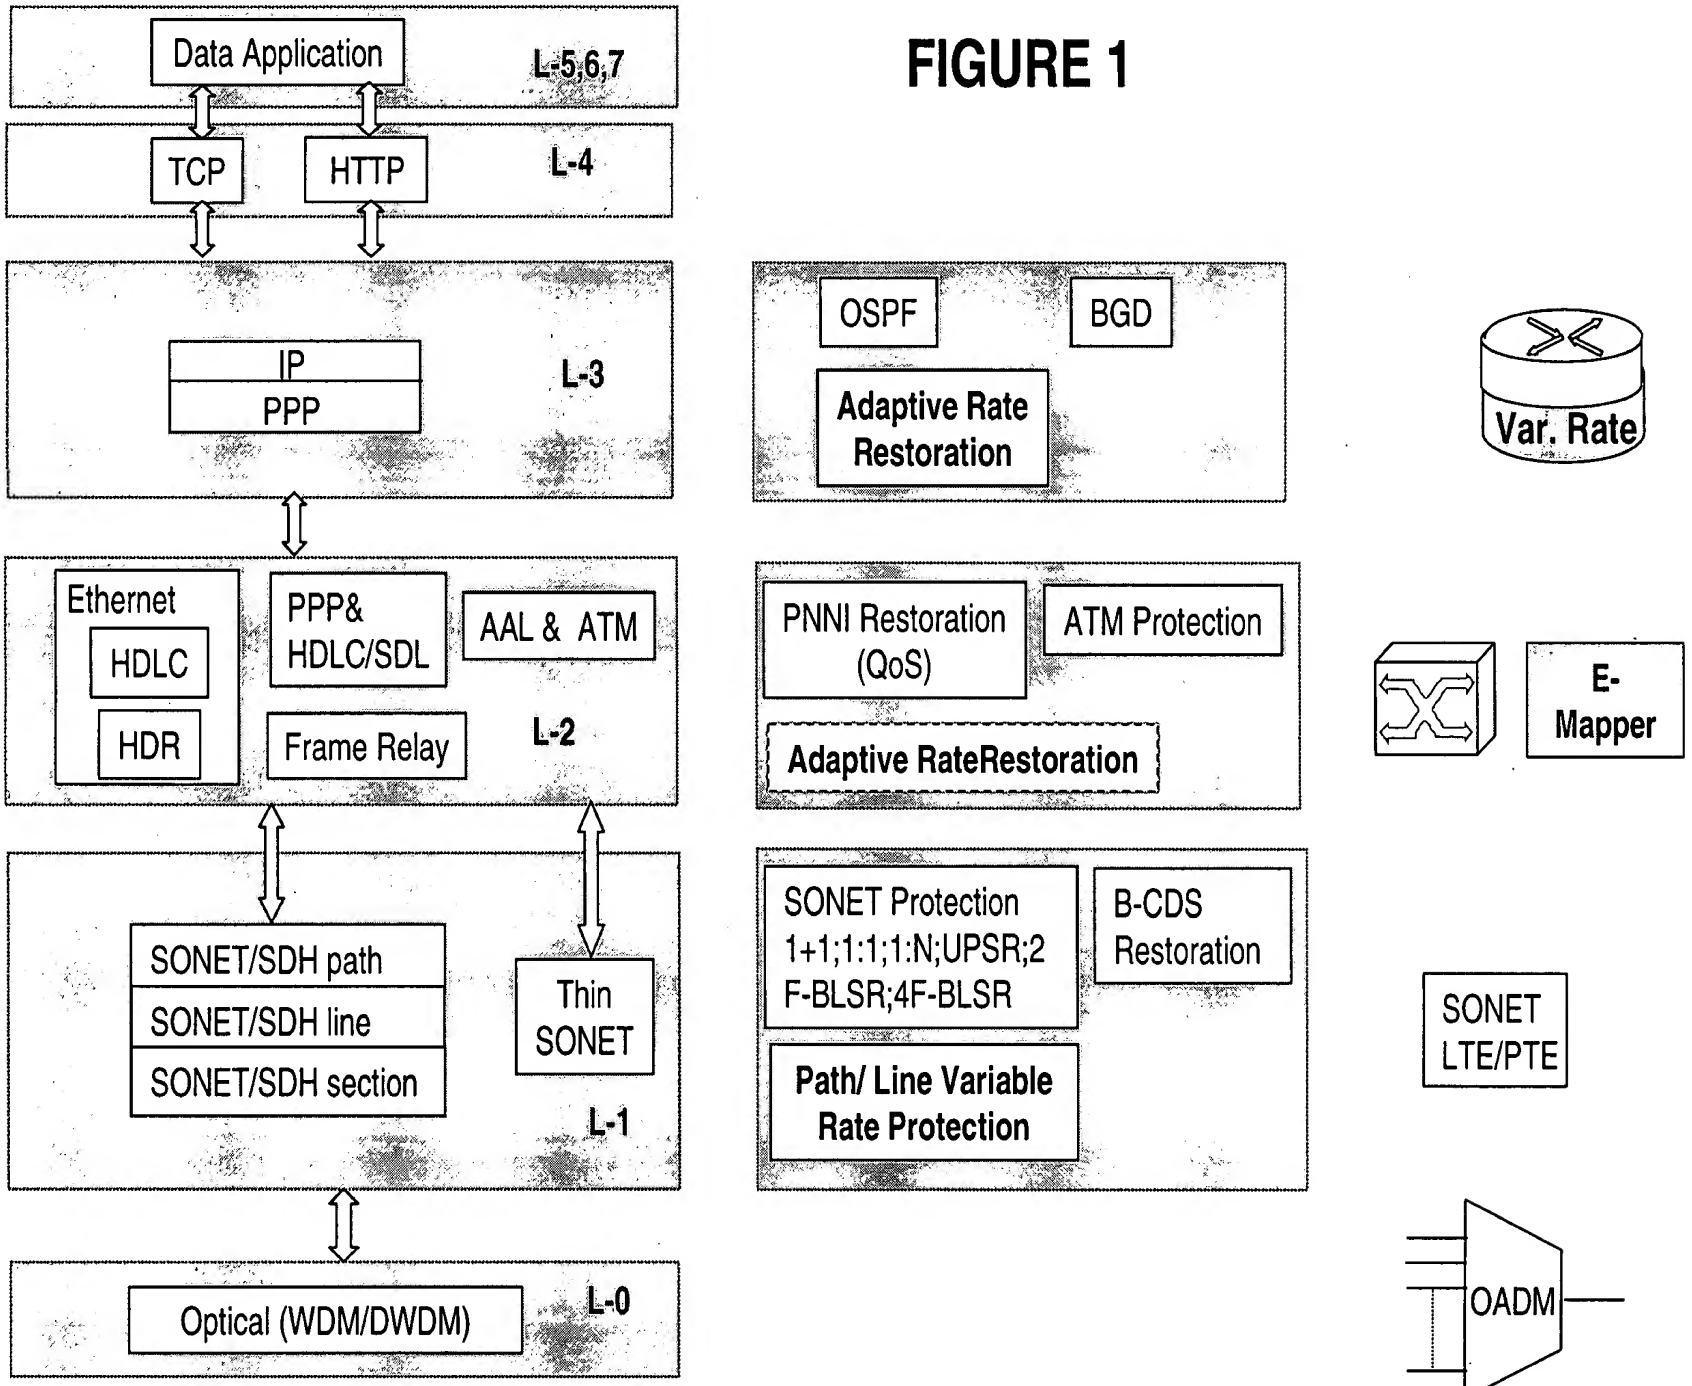

FIGURE 2

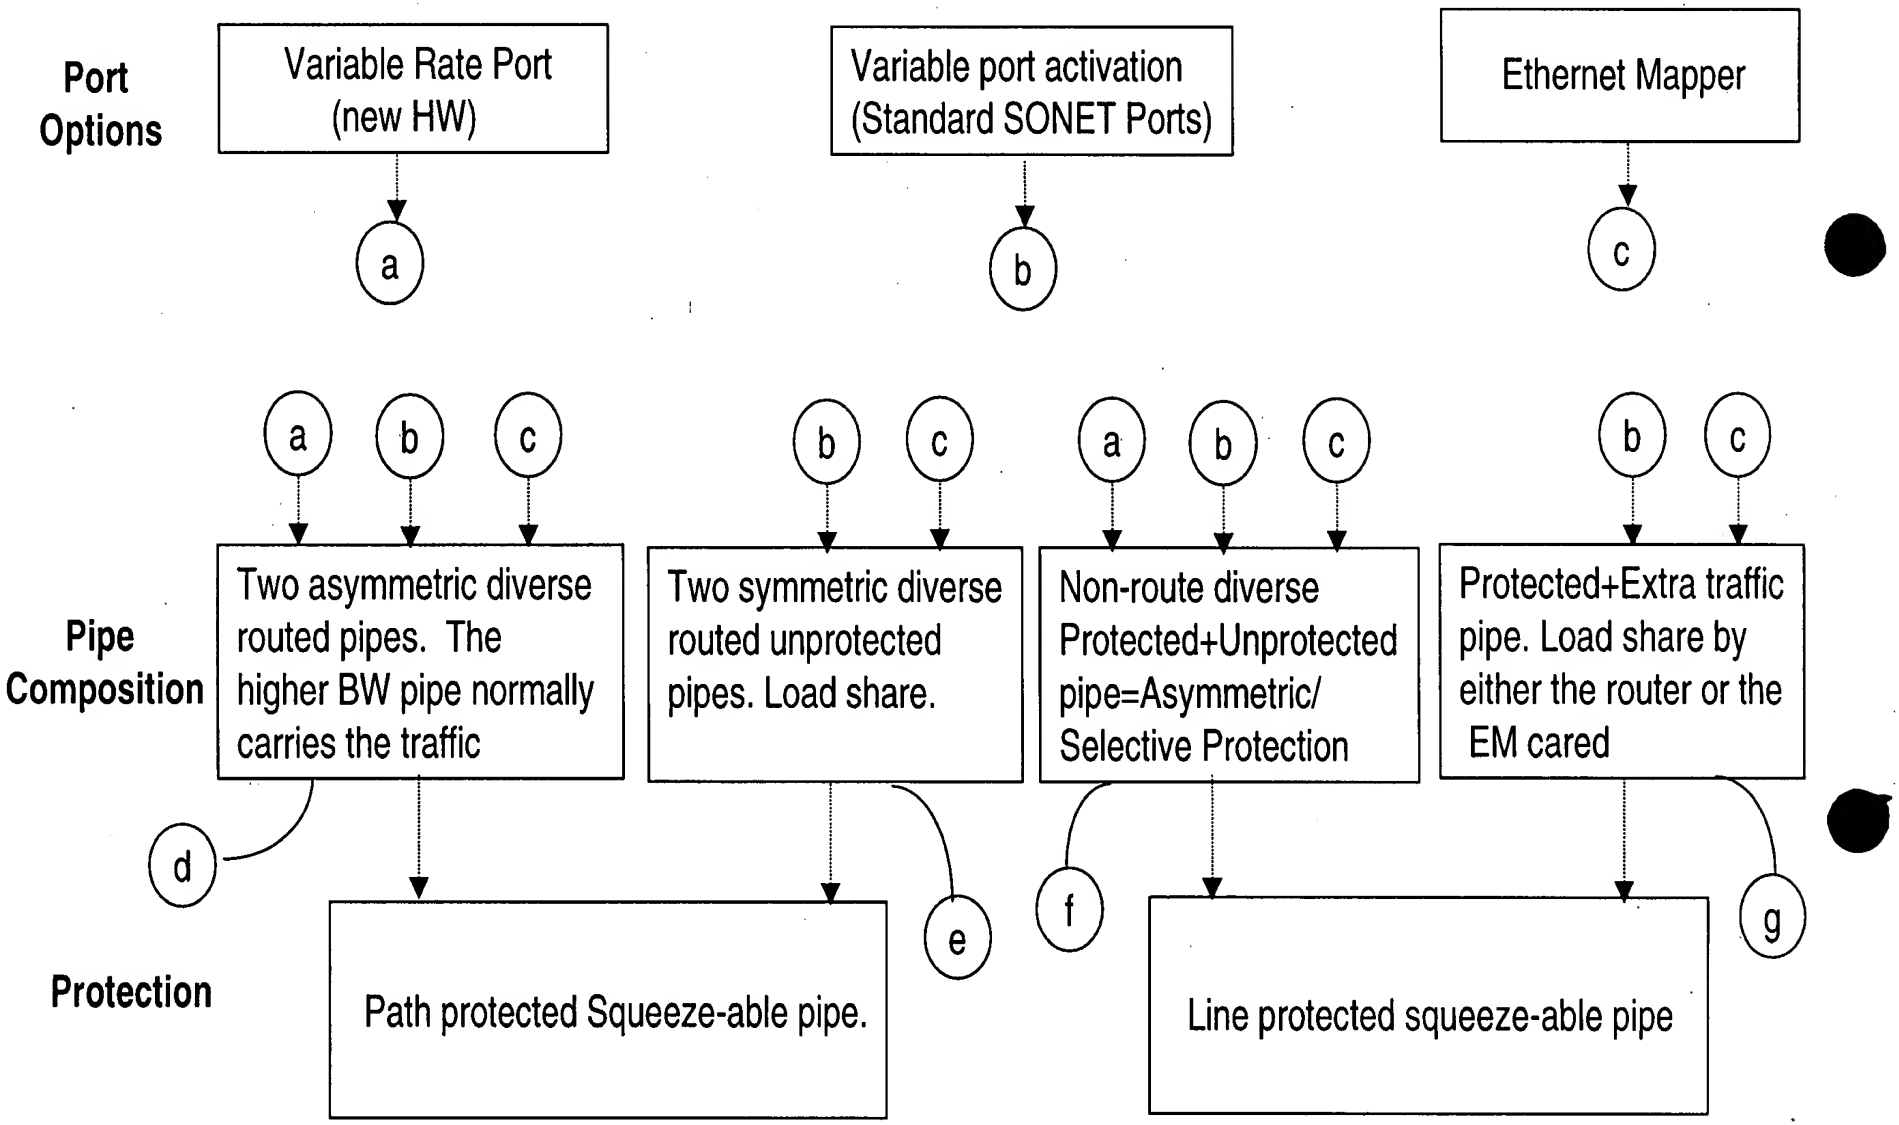
Port Options
Variable Rate Port (new HW)
Variable port activation (Standard SONET Ports)
Ethernet Mapper
a
b
c
Pipe Composition
Two asymmetric diverse routed pipes. The higher BW pipe normally carries the traffic
Two symmetric diverse routed unprotected pipes. Load share.
Non-route diverse Protected+Unprotected pipe=Asymmetric/ Selective Protection
Protected+Extra traffic pipe. Load share by either the router or the EM cared
d
e
f
g
Protection
Path protected Squeeze-able pipe.
Line protected squeeze-able pipe

SUBSTITUTE SHEET (RULE 26)

FIGURE 3A

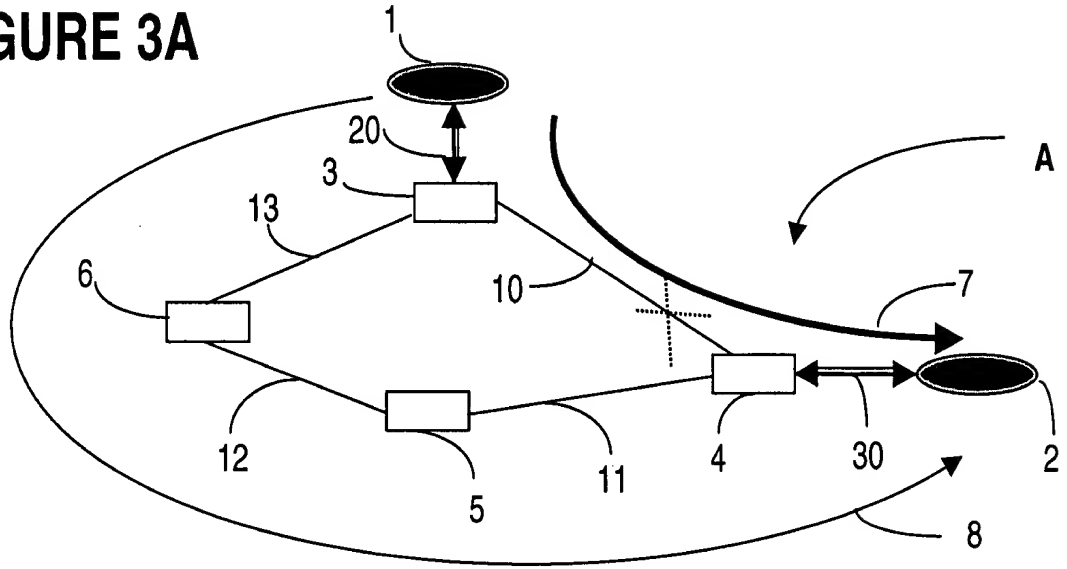

FIGURE 3B

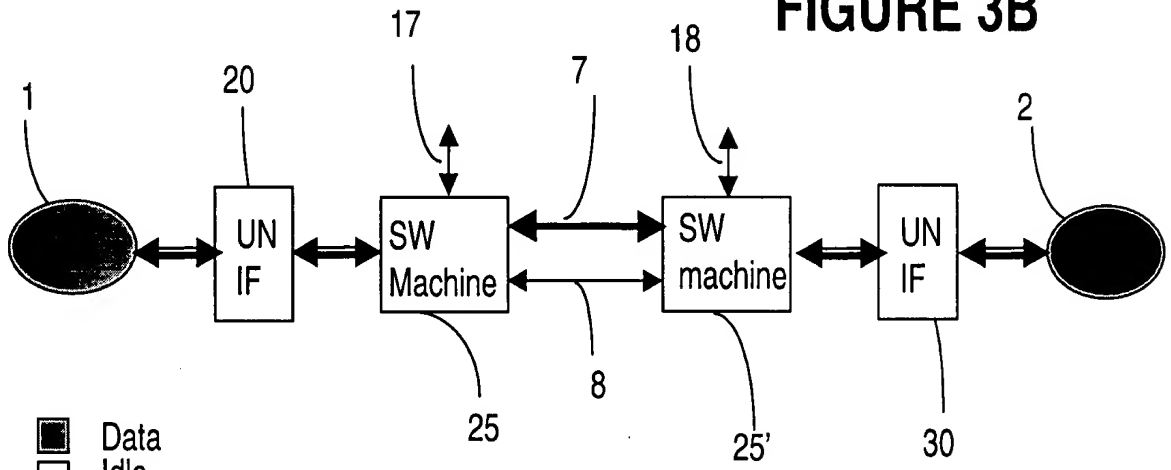

FIGURE 3C

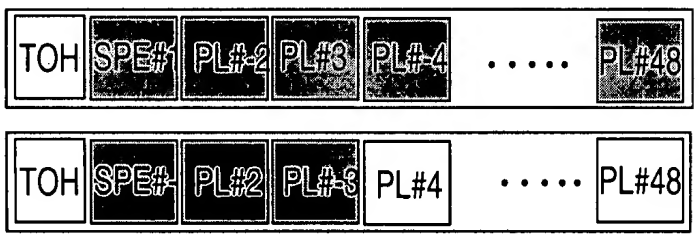

PCT/US2000/25126

FIGURE 4

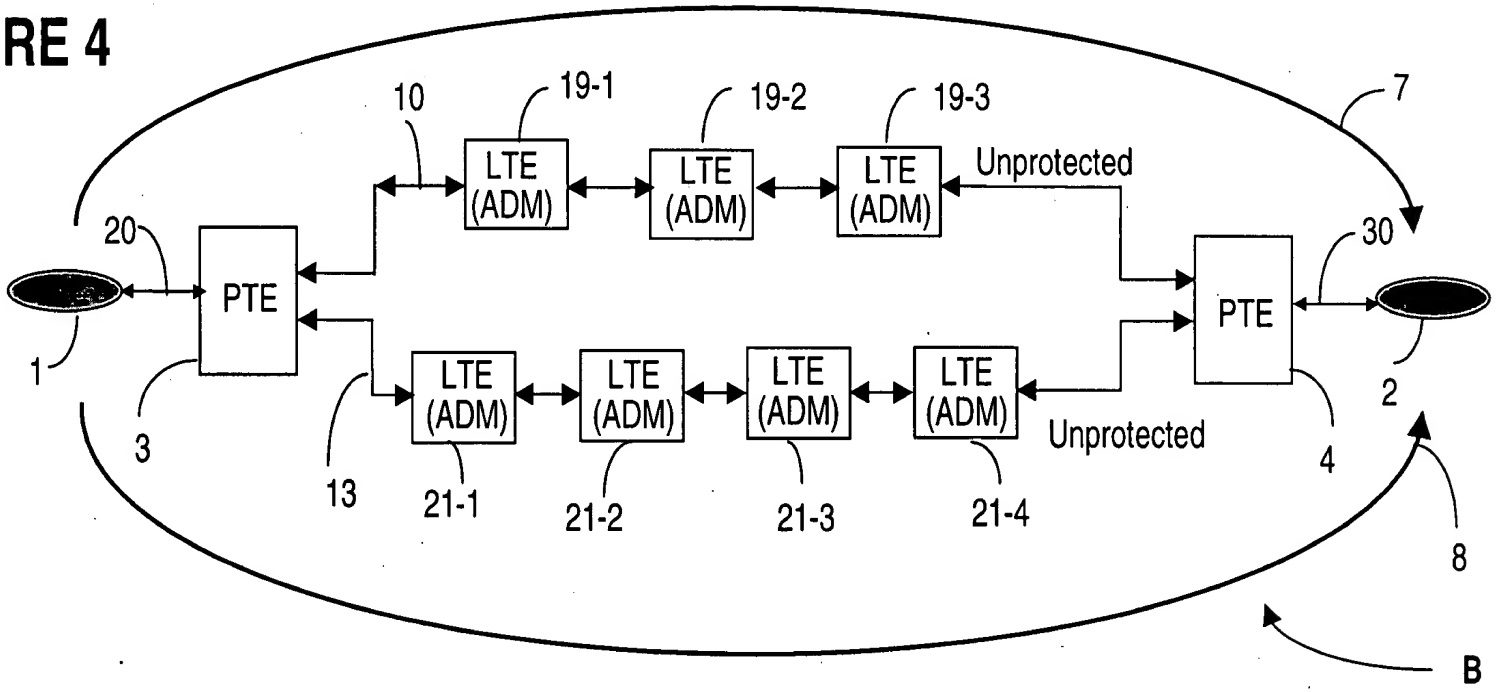

FIGURE 5a (Prior Art)

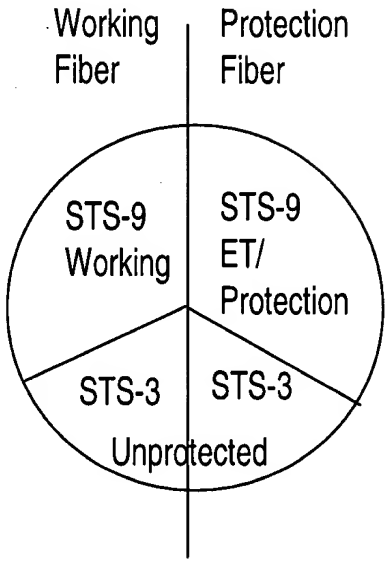

FIGURE 5b (Prior Art)

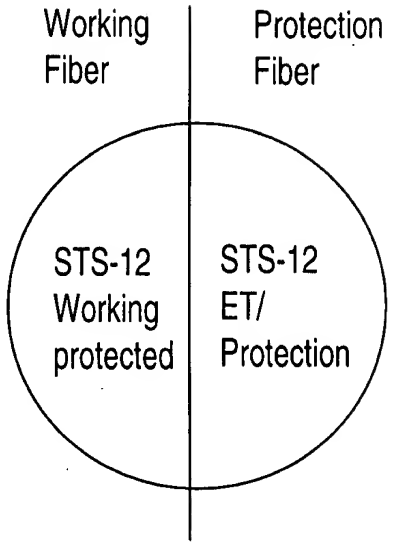

DOCKET ALARM

FIGURE 6A

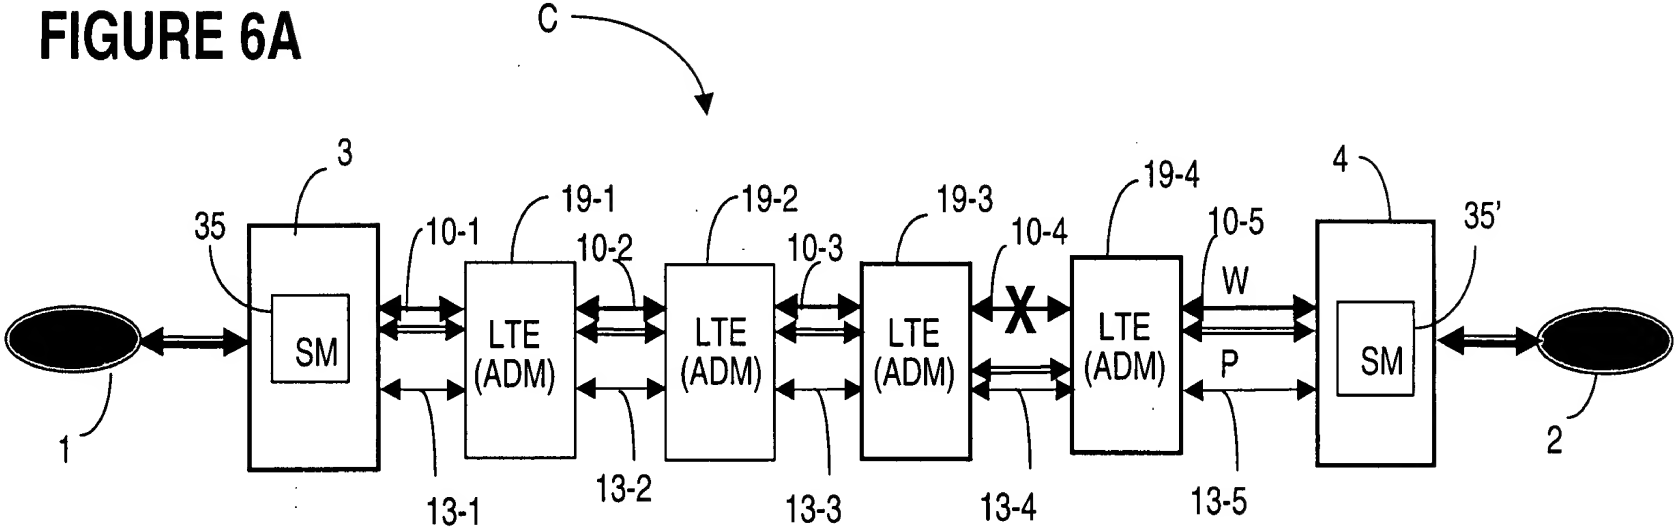

FIGURE 6B

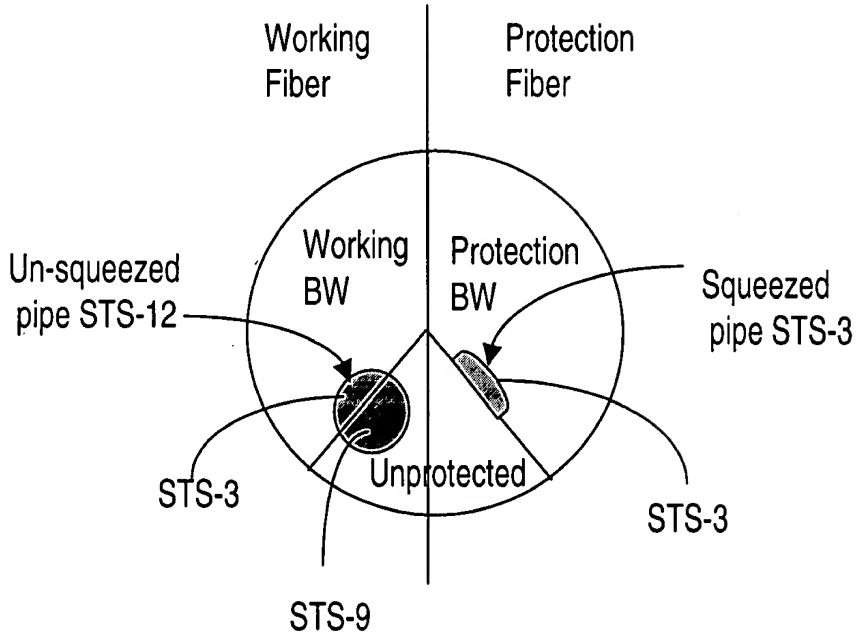

FIGURE 7

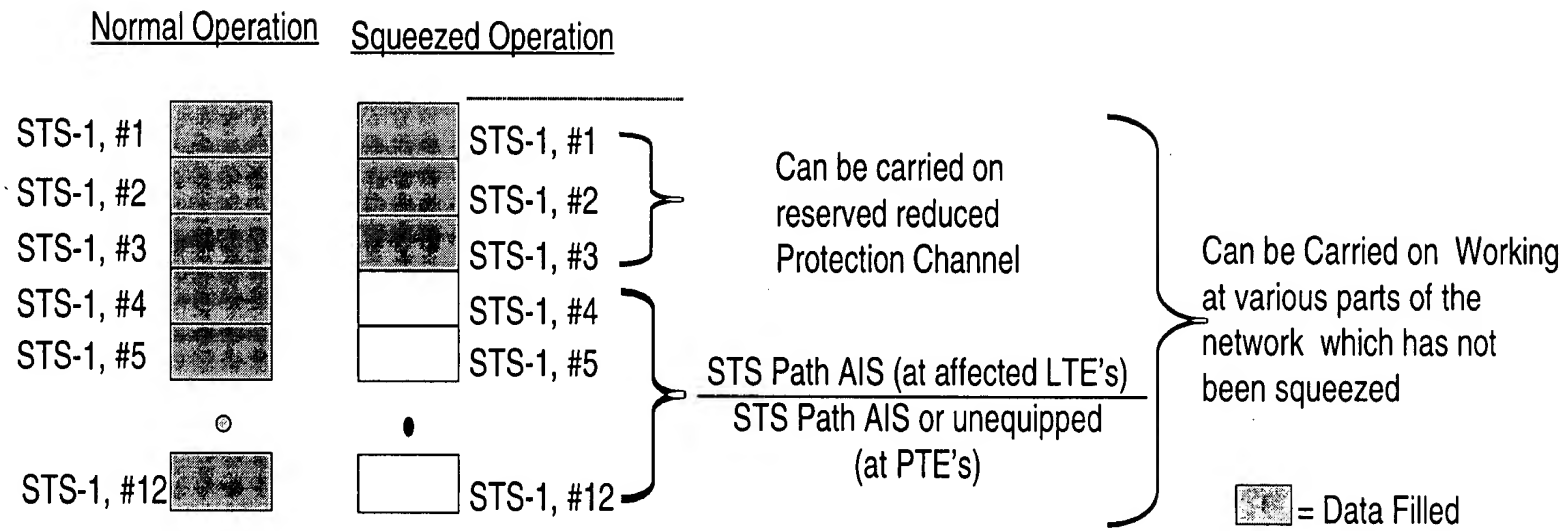

FIGURE 8

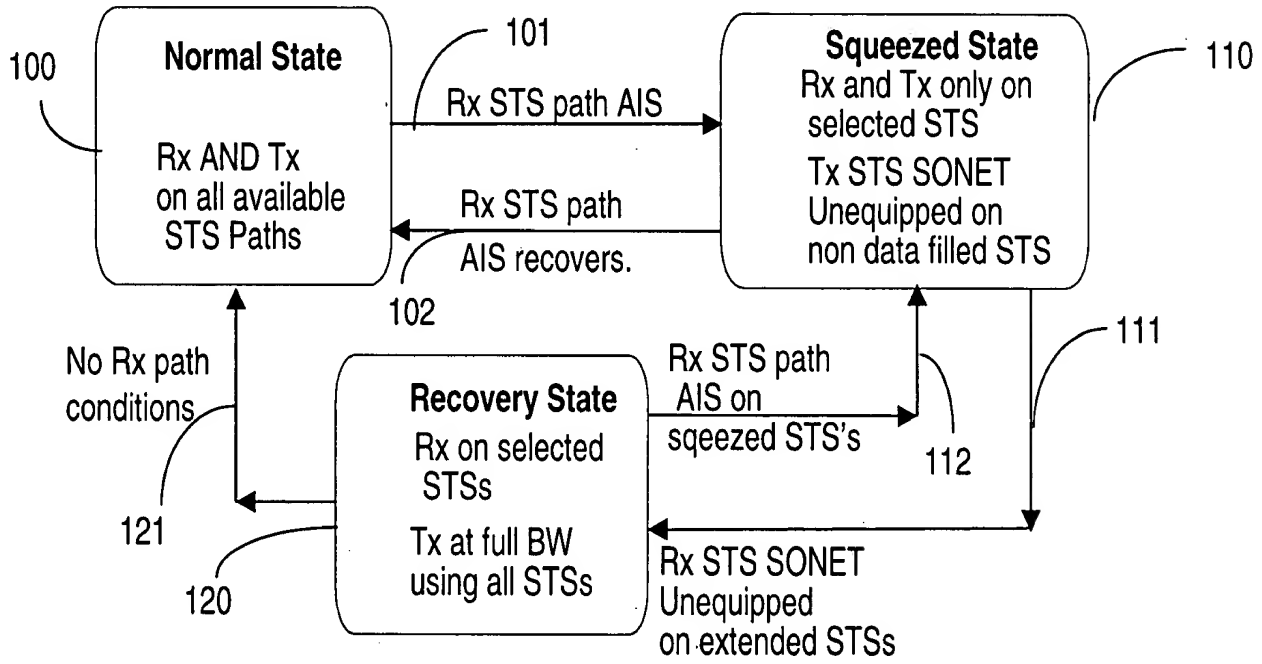

DETAILED DESCRIPTION

FIGURE 9A

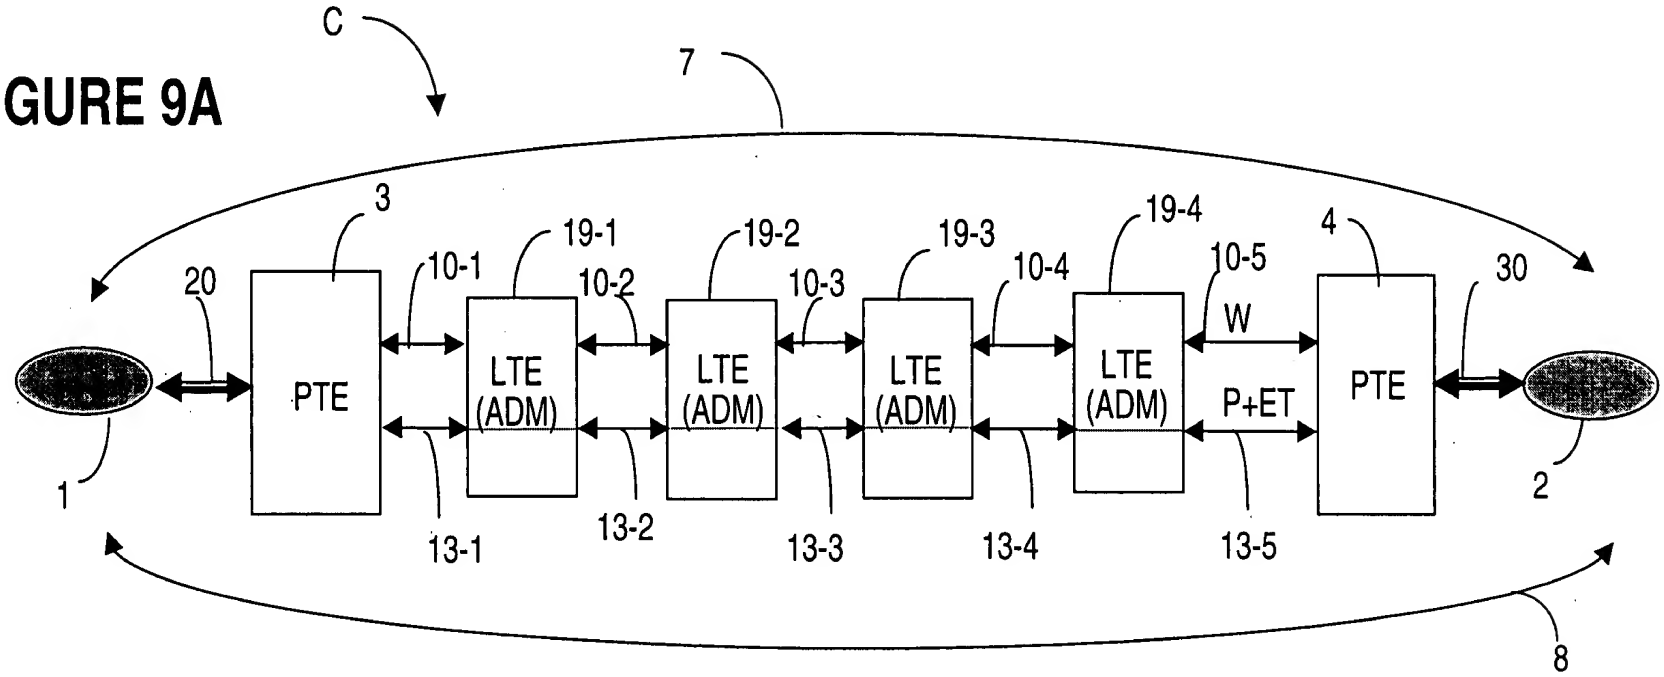
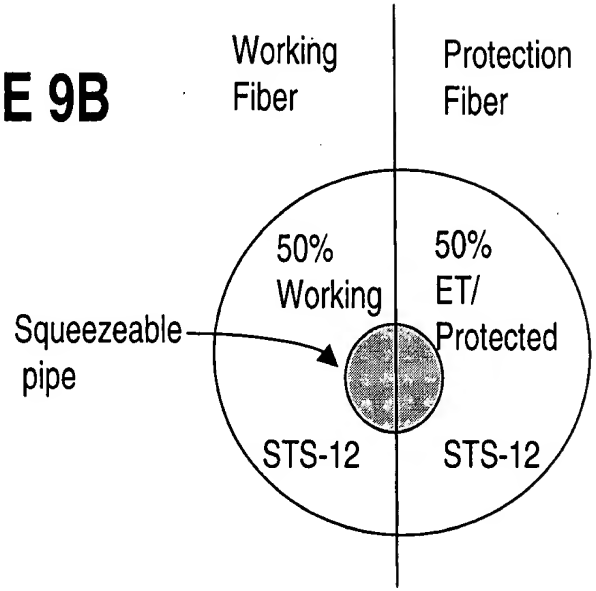
FIGURE 9B